

Wide Gold Intercepts Continue from Kalgoorlie East Gold Project Northern Zone Gold Project – Kalgoorlie

32 holes still awaiting assay, with results to date continuing to confirm high grade gold intercepts within an extensive lower grade porphyry gold halo

Highlights:

- Significant gold intercepts from angled RC drill holes:
 - 11m @ 1.38 g/t Au from 80m (NZRC015)
 - 18m @ 1.94 g/t Au from 49m (NZRC016)
 - inc. 3m @ 8.20 g/t Au from 60m
 - 14m @ 0.72 g/t Au from 41m (NZRC017)
 - inc. 3m @ 2.60 g/t Au from 52m
 - 12m @ 0.25 g/t Au from 69m (NZRC017)
 - 9m @ 0.56 g/t Au from 93m (NZRC017)
 - inc. 1m @ 2.14 g/t Au from 101m to EOH
- All RC drillholes from the 11-hole angled program intersected gold mineralisation, refer table 1
- 1,303 samples are awaiting assay from a further 32 vertical drill hole program targeting oxide mineralisation
- The results of recent drilling continue to confirm and enlarge the shallow gold mineralisation associated with the Northern Zone porphyry
- The dynamic Leapfrog gold model for Northern Zone will be updated with these latest results in the coming weeks, which will inform and guide future drill campaigns

David Lenigas, Chairman of RGL, said: *“The results continue to complement previous drill programs, and we continue to increase the footprint of the gold mineralisation, revealing good gold tenor within the shallower top of this considerable mineralised porphyry. We have a further 32 holes in the lab awaiting assay that will continue the Company’s consistent and regular news releases, reporting gold results as we advance the Kal East - Northern Zone Project towards a maiden MRE, and report on progress at our new early stage gold, copper silver and antimony discovery in New Brunswick.”*

Riversgold Limited (ASX: RGL, Riversgold or the Company) is pleased to announce the assay results from the final four (4) angled reverse circulation (RC) drill holes of an 11 hole 1,289m program recently completed at the Northern Zone Intrusive Hosted Gold Project, located 25 km east of Kalgoorlie in Western Australia (refer to **Figure 1** for location). A further 1,303 samples from a 1,805m vertical drill program have been submitted to the assay laboratory, with results expected over the coming weeks.

These RC program results, continue to successfully intersect the mineralised host porphyry over an increasing footprint within the tenement. All eleven RC holes intersected gold mineralisation. We will continue drilling to further our understanding of the project before proceeding with a Mineral Resource Estimate (**MRE**).

Possible ore processing scenarios have been demonstrated by the recent success of Black Cat Syndicate Ltd via their use of a turn-key funding, development and processing package at their Myhree/Boundary open pits, located 7km to the north of the Northern Zone Project.

Conceptually, the Company draws parallels between Northern Zone and Saturn Metals' Apollo Hill Project, discerning similarities based on the PEA statement released by Saturn Metals (ASX: 17 August 2023), which suggests the potential for a sizeable low-grade heap leach operation. Saturn Metals Limited has released a Preliminary Economic Assessment (PEA) on the Apollo Hill Gold Project which is located 175km due north of Northern Zone. With a resource estimate of 118Mt at 0.53g/t gold, totalling 2.03Moz¹, this development serves as a benchmark for our aspirations at Northern Zone, albeit with the potential for Northern Zone to be an even larger project.

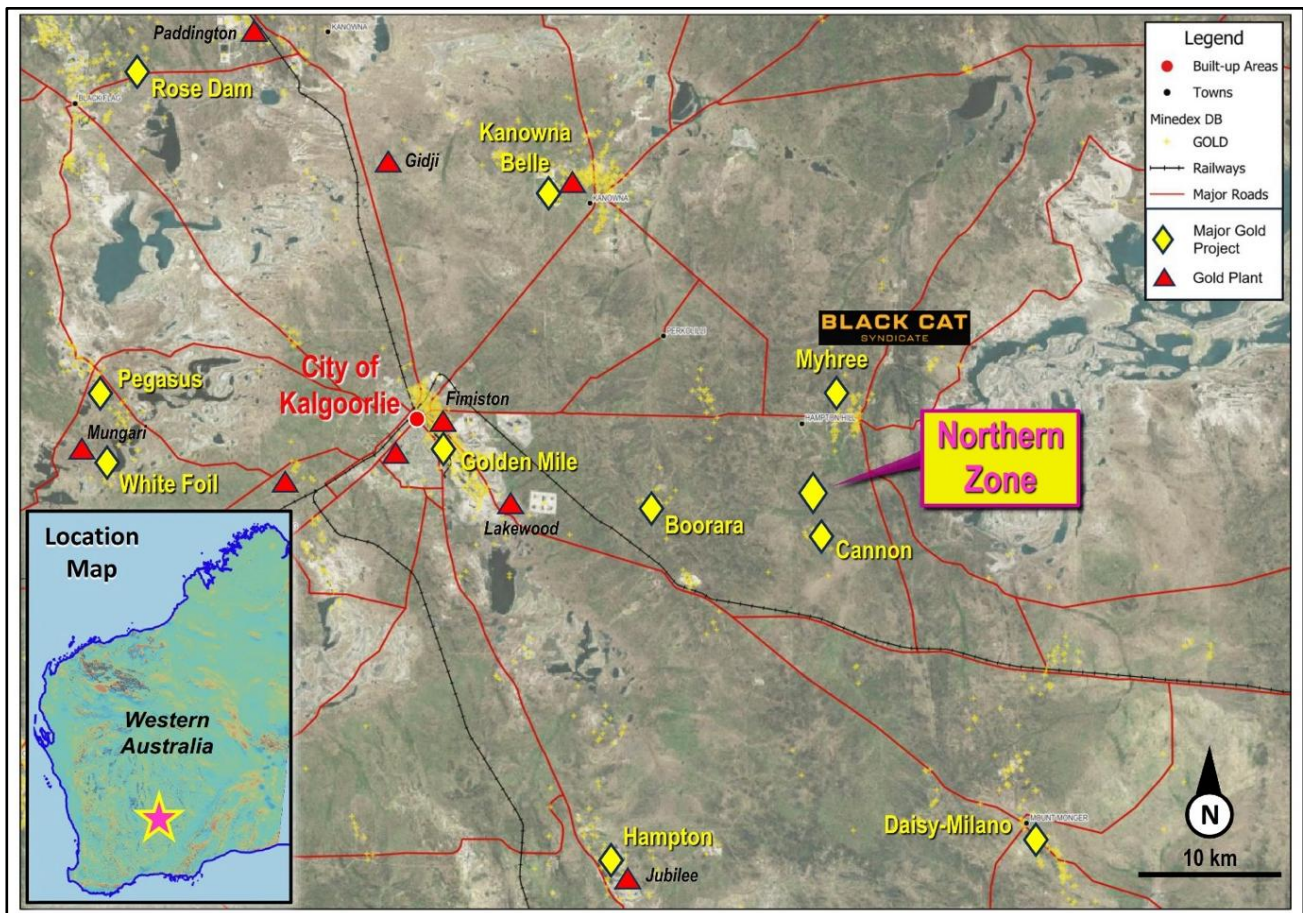


Figure 1: Northern Zone Project Map showing proximity to the Kalgoorlie "Super Pit".

¹ STN ASX announcement dated 12 February 2025 "Apollo Hill Gold Resources Exceeds 2Moz"

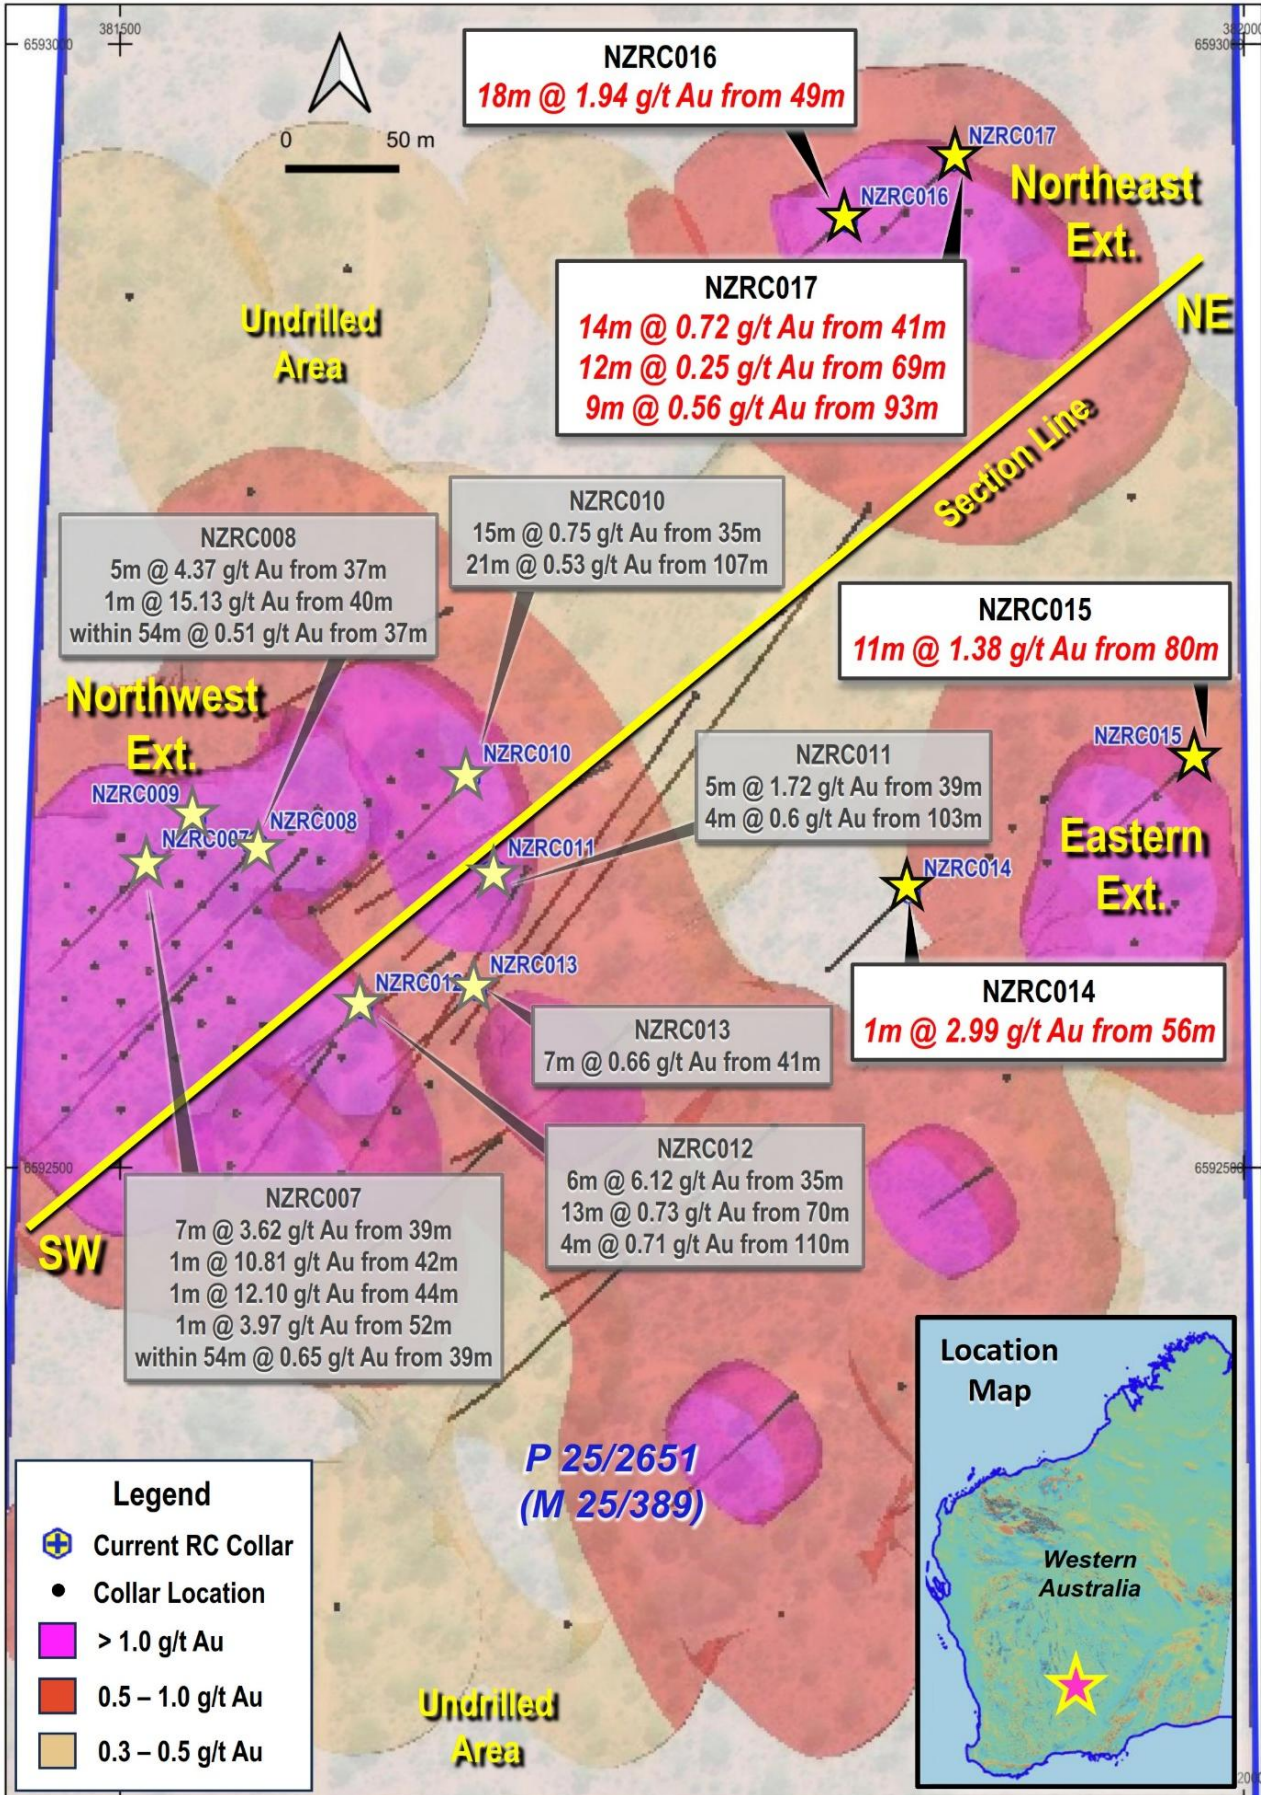


Figure 2: Recent RC drill collar plan with gold grade contours from all drilling results to date, and most recent drill intercepts in the north-eastern area of high-grade gold mineralisation. Previously reported RC drill collars are shown in grey.

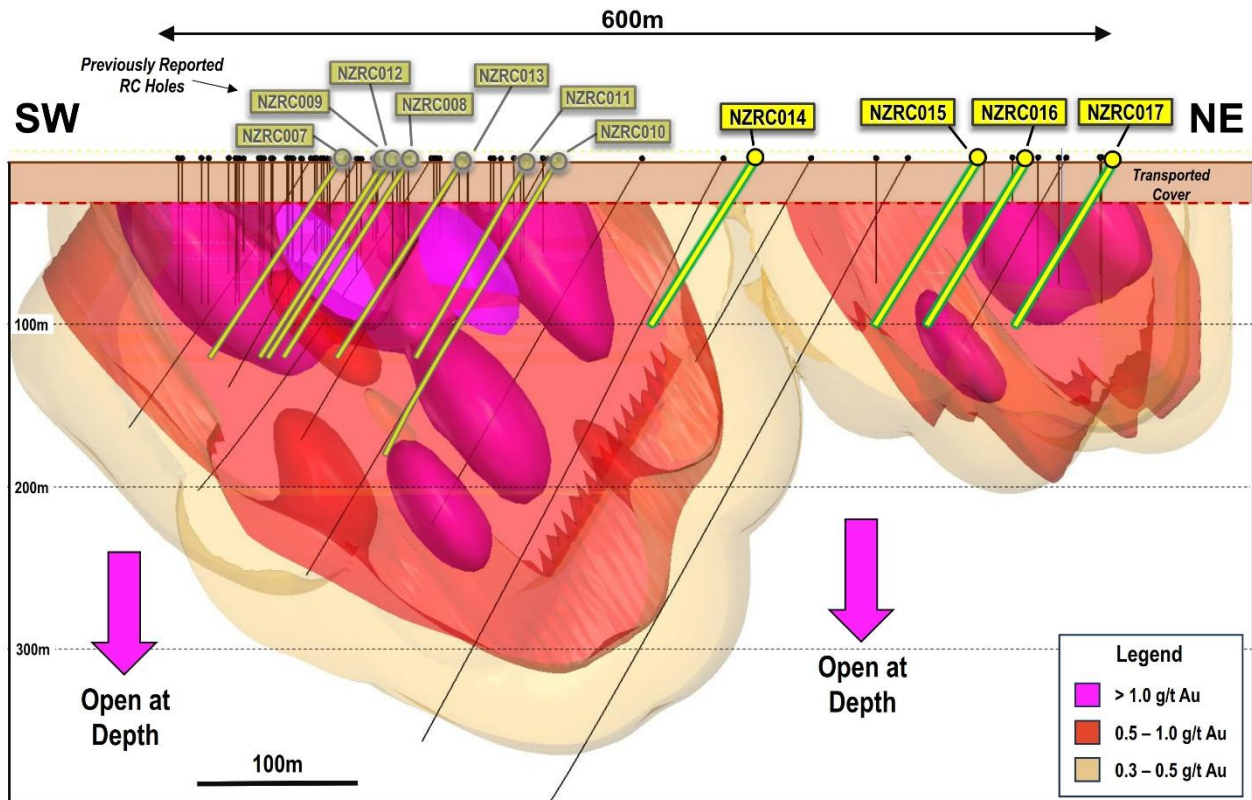


Figure 3: Cross-section of 3D Leapfrog software model. The interpretation illustrates gold grade shells, derived from all the significant intercepts reported to the ASX to date. The model is constrained via a 25m buffer to all the RGL/Oracle drill hole traces that have been drilled at Northern Zone since 2021. Refer to Figure 2 Drill collar plan for the location of the section line. Previously reported RC holes are shown in grey.

Eastern Extensional Cross-Sections

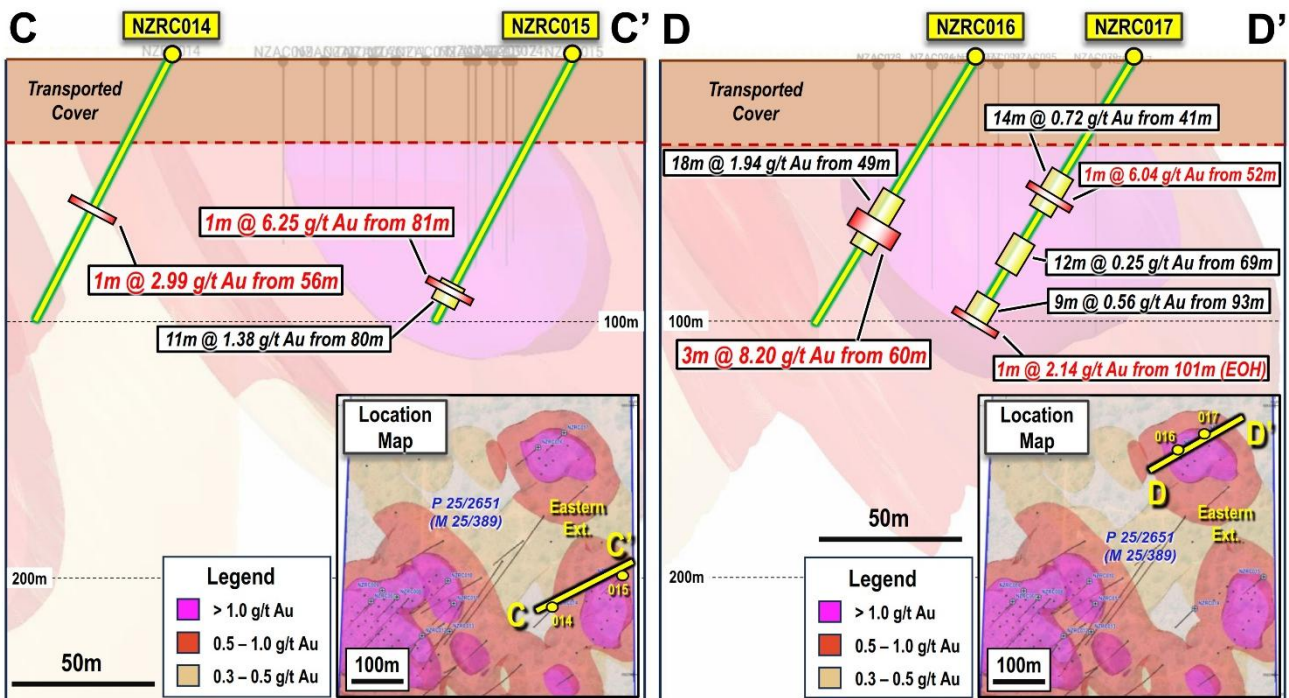


Figure 4: Schematic cross-sections of the final 4 RC drill holes being reported with location map. The model is constrained via a 25m buffer to all the RGL/Oracle drill hole traces that have been drilled at Northern Zone since 2021.

-ENDS-

This announcement has been authorised for release by the Board of Riversgold Ltd.

For further information, please contact:

David Lenigas
 Executive Chairman
 P: +44 (0) 7881825378
 E: dlenigas@riversgold.com.au

Ed Mead
 Director
 P: 0407 445351
 E: emead@riversgold.com.au

Competent Person's Statement

The information in this report that relates to exploration results is based on information compiled by Mr Edward Mead, who is a Fellow of the Australasian Institute of Mining and Metallurgy. Mr Mead is a director of Riversgold Ltd and a consultant to the Company through Doraleta Pty Ltd. Mr Mead has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity that he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves' (the JORC Code). Mr Mead consents to the inclusion of this information in the form and context in which it appears in this report.

The Company advises that previous exploration results referred to in this announcement were reported in accordance with Listing Rule 5.7 on 19 March 2025 and 3 April 2025 and there have been no material changes since first reported.

APPENDIX 1: Drilling Information

Table 1: Northern Zone Significant Intercepts from all RC drill holes

Hole ID	From (m)	To (m)	Width (m)	Au g/t	Intercept
NZRC007	40	55	15	2.1	15m @ 2.1 g/t Au from 40m , NZRC007
NZRC008	37	42	5	4.37	5m @ 4.37 g/t Au from 37m , NZRC008
NZRC009	68	69	1	0.89	1m @ 0.89 g/t Au from 68m , NZRC009
NZRC010	35	50	15	0.75	15m @ 0.75 g/t Au from 35m , NZRC010
NZRC010	107	128	21	0.53	21m @ 0.53 g/t Au from 107m , NZRC010
NZRC011	39	44	5	1.72	5m @ 1.72 g/t Au from 39m , NZRC011
NZRC011	103	107	4	0.6	4m @ 0.6 g/t Au from 103m , NZRC011
NZRC012	35	41	6	6.12	6m @ 6.12 g/t Au from 35m , NZRC012
NZRC012	70	76	6	1.03	13m @ 0.73 g/t Au from 70m , NZRC012
NZRC012	110	114	4	0.71	4m @ 0.71 g/t Au from 110m , NZRC012
NZRC013	41	48	7	0.66	7m @ 0.66 g/t Au from 41m , NZRC013
NZRC014	56	57	1	2.99	1m @ 2.99 g/t Au from 56m , NZRC014
NZRC015	80	91	11	1.38	11m @ 1.38 g/t Au from 80m , NZRC015
NZRC016	49	67	18	1.94	18m @ 1.94 g/t Au from 49m , NZRC016
including	60	63	3	8.20	Including 3m @ 8.20 g/t Au from 60m
NZRC017	41	55	14	0.72	14m @ 0.72 g/t Au from 41m , NZRC017
including	52	55	3	2.60	Including 3m @ 2.60 g/t Au from 52m

Hole ID	From (m)	To (m)	Width (m)	Au g/t	Intercept
NZRC017	69	81	12	0.25	12m @ 0.25 g/t Au from 69m , NZRC017
NZRC017	93	102	9	0.56	9m @ 0.56 g/t Au from 93m , NZRC017
including	101	102	1	2.14	Including 1m @ 2.14 g/t Au from 101m to EOH

Table 2: Northern Zone Drill Collar Locations

Hole id	Type	MGA_E	MGA_N	Elevation (m)	Total Depth (m)	Dip (°)	AZM_MGA	Date
NZRC007	RC	381512	6592636	356.95	120	-60	225	04/03/25
NZRC008	RC	381560	6592644	356.82	121	-60	225	03/03/25
NZRC009	RC	381533	6592656	356.98	100	-60	225	05/03/25
NZRC010	RC	381655	6592674	356.62	180	-60	225	07/03/25
NZRC011	RC	381666	6592632	356.47	120	-60	225	08/03/25
NZRC012	RC	381607	6592572	356.66	120	-60	225	08/03/25
NZRC013	RC	381658	6592580	356.22	120	-60	225	09/03/25
NZRC014	RC	381851	6592623	356.48	102	-60	225	10/03/25
NZRC015	RC	381979	6592682	356.85	102	-60	225	10/03/25
NZRC016	RC	381823	6592922	356.47	102	-60	225	10/03/25
NZRC017	RC	381871	6592949	357.69	102	-60	225	11/03/25

Table 3: Northern Zone assay results above 0.3 g/t Au from all RC drill holes

Hole ID	Depth From	Depth To	Width	Au ppm
NZRC007	39	40	1	1.05
NZRC007	41	42	1	0.49
NZRC007	42	43	1	10.81
NZRC007	44	45	1	12.1
NZRC007	45	46	1	0.6
NZRC007	51	52	1	0.73
NZRC007	52	53	1	3.97
NZRC007	53	54	1	0.79
NZRC007	91	92	1	0.73
NZRC007	118	119	1	0.36
NZRC008	37	38	1	3.5
NZRC008	39	40	1	2.46
NZRC008	40	41	1	15.13
NZRC008	41	42	1	0.5
NZRC008	64	65	1	0.51
NZRC008	75	76	1	0.63
NZRC008	76	77	1	0.94
NZRC008	81	82	1	0.34
NZRC008	90	91	1	0.32
NZRC009	68	69	1	0.89
NZRC010	35	36	1	0.47
NZRC010	36	37	1	0.53
NZRC010	37	38	1	0.47
NZRC010	38	39	1	0.46
NZRC010	40	41	1	0.98

Hole ID	Depth From	Depth To	Width	Au ppm
NZRC010	42	43	1	0.33
NZRC010	49	50	1	7.11
NZRC010	103	104	1	0.3
NZRC010	108	109	1	1.26
NZRC010	114	115	1	0.4
NZRC010	115	116	1	0.9
NZRC010	116	117	1	0.41
NZRC010	118	119	1	0.73
NZRC010	120	121	1	0.78
NZRC010	121	122	1	0.84
NZRC010	123	124	1	0.66
NZRC010	125	126	1	0.39
NZRC010	126	127	1	0.33
NZRC010	127	128	1	2.85
NZRC010	150	151	1	0.56
NZRC010	153	154	1	0.67
NZRC010	160	161	1	0.33
NZRC011	39	40	1	1.03
NZRC011	40	41	1	4.14
NZRC011	41	42	1	2.88
NZRC011	43	44	1	0.47
NZRC011	80	81	1	0.32
NZRC011	82	83	1	0.61
NZRC011	83	84	1	0.31
NZRC011	99	100	1	0.34

Hole ID	Depth From	Depth To	Width	Au ppm
NZRC011	103	104	1	1.09
NZRC011	106	107	1	0.88
NZRC012	21	22	1	0.62
NZRC012	35	36	1	0.59
NZRC012	36	37	1	32.23
NZRC012	37	38	1	1.01
NZRC012	38	39	1	2.21
NZRC012	40	41	1	0.38
NZRC012	70	71	1	0.77
NZRC012	71	72	1	0.71
NZRC012	72	73	1	1.11
NZRC012	73	74	1	0.9
NZRC012	74	75	1	1.45
NZRC012	75	76	1	1.25
NZRC012	81	82	1	2.19
NZRC012	82	83	1	0.37
NZRC012	106	107	1	0.3
NZRC012	110	111	1	0.64
NZRC012	113	114	1	0.38
NZRC013	41	42	1	0.34
NZRC013	42	43	1	2.09
NZRC013	45	46	1	0.52
NZRC013	46	47	1	0.49
NZRC013	47	48	1	0.96
NZRC013	94	95	1	0.51
NZRC013	95	96	1	0.85
NZRC013	103	104	1	0.31
NZRC013	47	48	1	0.96
NZRC013	94	95	1	0.51
NZRC013	95	96	1	0.85
NZRC013	103	104	1	0.31
NZRC014	56	57	1	2.99
NZRC014	76	77	1	0.67
NZRC015	30	31	1	0.3
NZRC015	32	33	1	0.56
NZRC015	54	55	1	0.45
NZRC015	55	56	1	0.73
NZRC015	58	59	1	0.77
NZRC015	80	81	1	0.95
NZRC015	81	82	1	6.25

Hole ID	Depth From	Depth To	Width	Au ppm
NZRC015	82	83	1	0.43
NZRC015	83	84	1	0.33
NZRC015	86	87	1	1.09
NZRC015	87	88	1	2.31
NZRC015	88	89	1	1.3
NZRC015	89	90	1	0.34
NZRC015	90	91	1	1.8
NZRC015	100	101	1	0.37
NZRC016	49	50	1	1.84
NZRC016	50	51	1	4.6
NZRC016	54	55	1	0.62
NZRC016	60	61	1	4.78
NZRC016	61	62	1	16.27
NZRC016	62	63	1	3.56
NZRC016	63	64	1	0.98
NZRC016	64	65	1	0.73
NZRC016	65	66	1	0.72
NZRC016	66	67	1	0.31
NZRC016	71	72	1	0.34
NZRC016	74	75	1	0.34
NZRC017	41	42	1	0.44
NZRC017	42	43	1	0.39
NZRC017	48	49	1	0.81
NZRC017	49	50	1	0.36
NZRC017	52	53	1	6.04
NZRC017	53	54	1	1.06
NZRC017	54	55	1	0.69
NZRC017	58	59	1	0.43
NZRC017	69	70	1	0.72
NZRC017	75	76	1	0.86
NZRC017	80	81	1	0.83
NZRC017	93	94	1	0.99
NZRC017	94	95	1	0.85
NZRC017	97	98	1	0.32
NZRC017	100	101	1	0.33
NZRC017	101	102	1	2.14

APPENDIX 2: JORC INFORMATION

The following Tables are provided to ensure compliance with the JORC Code (2012 Edition) requirements for the reporting of Exploration Results at Northern Zone.

Section 1: Sampling Techniques and Data

(Criteria in this section applies to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<p><i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<p>Every metre drilled was sampled at the drill rig using a rig mounted static cone splitter to collect 2 – 3kg sub samples.</p> <p>Standard reference material, sample duplicates and blanks, were automatically placed at 25m sample intervals from the cone splitter</p> <p>1m samples were sent to the laboratory for crushing, splitting and analysis.</p> <p>Analysis was undertaken by ALS laboratories (Perth) for gold assay by 50g fire assay.</p> <p>Samples were sent to the laboratory for crushing, splitting and analysis.</p> <p>Analysis was undertaken by Jinnings laboratories (Kalgoorlie) for gold assay by 50g fire assay.</p>
Drilling techniques	<p><i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></p>	<p>Top Drill completed by reverse circulation drilling techniques using a standard 5.5inch (143mm) diameter bit.</p> <p>A face sampling down hole hammer was used at all times using a bit retention system.</p>
Drill sample recovery	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<p>Drill recovery was routinely recorded via estimation of the comparative percentage of the volume of the sample bag by the company geologist.</p> <p>The sample recovery was deemed excellent for representative assays.</p> <p>The cyclone was cleaned or checked every 6m.</p>
Logging	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p>All holes have been geologically logged for lithology, mineralisation and weathering. As well as whether dry, damp or wet.</p> <p>Logging is quantitative for presence of quartz veins. All other logging is qualitative.</p> <p>A brief description of each drilling sample was recorded and a permanent record has been collected and stored in chip trays for reference.</p>
Sub-sampling techniques and sample preparation	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <p><i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<p>A sub sample from the RC drill rig of approximately 2-3kg was taken from the sample splitter off the cyclone. These assaying techniques are considered appropriate for this style of mineralisation.</p> <p>The use of fire assay with 50g charge for all RC drilling provides a level of confidence in the assay database.</p> <p>The sampling and assaying in considered representative of the in-situ material.</p> <p>The sample size of 2-4 kilograms is appropriate and representative of the grain size and mineralisation style of the deposit.</p>

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	Jinnings (Kalgoorlie) were used for all analysis of drill samples submitted by Riversgold. The laboratory techniques below are for all samples submitted to Jinnings and are considered appropriate for the style of mineralisation defined within the Northern Zone Project area: Samples above 3Kg were riffle split. Pulverise to 95% passing 75 microns 50-gram Fire Assay (FA50A) – Au Duplicates, Standards and Blanks were used for external laboratory checks by RGL
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data.</i>	Intercepts were reviewed by 2 company personnel.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control.</i>	The collar position of each hole was recorded using handheld GPS. The down hole survey data was taken at 30m using standard down hole gyro tools.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied.</i>	The holes were drilled on a Northeast-Southwest traverse at 225 deg on -60deg. The drill holes are to further follow up on vertical drill holes. The spacing is sufficient to establish grade and geological continuity.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	Based on logging of diamond core the drill holes appear to be orientated perpendicular to strike and dip of the main mineralised structures. An interpreted fault though the middle of the mineralisation may have caused some displacement.
Sample security	<i>The measures taken to ensure sample security.</i>	Company personnel delivered samples to Jinnings Kalgoorlie where they were submitted for assay.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	Data reviews will be conducted on completion of further drilling

Section 2: Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The Northern Zone Project is comprised of one granted prospecting licence (P25/2651) which covers an area of 82 hectares, and is held in the name of Oracle Gold (WA) Pty Ltd. RGL have farmed into the Tenement and have exceeded minimum spend of \$600,000 in exploration expenditure on the tenement within two years, to achieve 80% ownership. RGL has notified Oracle of meeting the farmin. The JV documents are to be formalised by December 2025. Oracle will be required to contribute pro-rata or dilute.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	The majority of previous exploration in the area was by Northern Mining during 2007 to 2012 under the Blair North project, multiple small resource areas were identified at the George's Reward area to the south of P25/2651. Numerous gold intersections were recorded

Criteria	JORC Code explanation	Commentary
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	The deposit sought is (Intrusion Related Gold System (IRGS) style of mineral deposit.
Drill hole Information	<p><i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i></p> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <p><i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i></p>	Refer to Tables and Figures within the body of the release.
Data aggregation methods	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p> <p><i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p>	Intersections are weighted average grades based on a 0.001 g/t Au cut-off with unlimited waste zones but with a targeted grade of 0.4-0.6g/t Au.
Relationship between mineralisation widths and intercept lengths	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg ‘down hole length, true width not known’).</i></p>	The diamond drilling program in 2023 confirmed the apparent widths of mineralisation as being perpendicular to foliation and veining. We believe the step out RC drilling to be the same as the diamond drilling. The true width of mineralisation is still to be fully ascertained.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	See body of the announcement for relevant diagrams and photos.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	The reporting of exploration results is considered balanced by the competent person.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	See body of the announcement.
Further work	<p><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	<ul style="list-style-type: none"> • Follow up phases of drilling to further test strike to be undertaken. • Complete a maiden MRE